



Strong, Fast, Economical and Adjustable

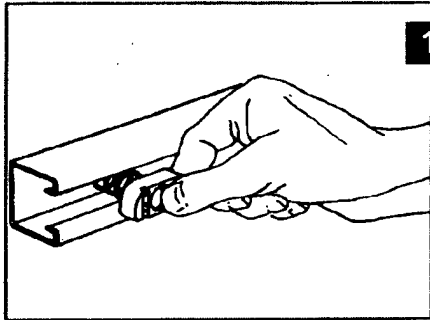


- 1** Insert the spring nut anywhere along the continuous slotted channel. The rounded nut ends permit easy insertion.




A 90° clockwise turn aligns the grooves in the nut with the intumed edges of the channel.

- 2** Fittings can be placed anywhere along the channel opening, permitting complete freedom of adjustment. The need for drilling holes is eliminated.




- 3** Insert bolt through fitting and into the spring nut. (See illustration 5 for end view showing nut in place)

Additional channel sections can now be bolted to the fitting already in place by following procedure described in steps 1-3.

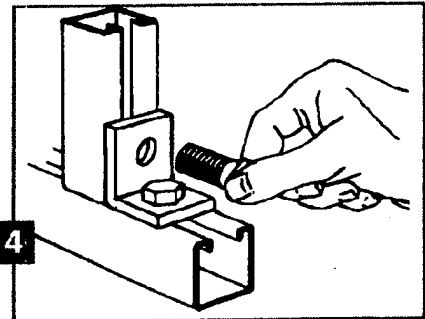

4

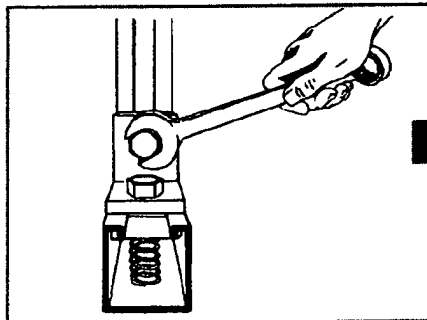

- 5** Tightening with a wrench locks the serrated teeth of the nut into the intumed edges of the channel, to complete a strong, vise-like connection.